

Search for resonant second generation slepton production at the Tevatron

V.M. Abazov,³⁶ B. Abbott,⁷⁶ M. Abolins,⁶⁶ B.S. Acharya,²⁹ M. Adams,⁵² T. Adams,⁵⁰ M. Agelou,¹⁸ J.-L. Agram,¹⁹ S.H. Ahn,³¹ M. Ahsan,⁶⁰ G.D. Alexeev,³⁶ G. Alkhazov,⁴⁰ A. Alton,⁶⁵ G. Alverson,⁶⁴ G.A. Alves,² M. Anastasoae,³⁵ T. Andeen,⁵⁴ S. Anderson,⁴⁶ B. Andrieu,¹⁷ M.S. Anzelc,⁵⁴ Y. Arnoud,¹⁴ M. Arov,⁵³ A. Askew,⁵⁰ B. Åsman,⁴¹ A.C.S. Assis Jesus,³ O. Atramentov,⁵⁸ C. Autermann,²¹ C. Avila,⁸ C. Ay,²⁴ F. Badaud,¹³ A. Baden,⁶² L. Bagby,⁵³ B. Baldin,⁵¹ D.V. Bandurin,⁵⁹ P. Banerjee,²⁹ S. Banerjee,²⁹ E. Barberis,⁶⁴ P. Bargassa,⁸¹ P. Baringer,⁵⁹ C. Barnes,⁴⁴ J. Barreto,² J.F. Bartlett,⁵¹ U. Bassler,¹⁷ D. Bauer,⁴⁴ A. Bean,⁵⁹ M. Begalli,³ M. Begel,⁷² C. Belanger-Champagne,⁵ L. Bellantoni,⁵¹ A. Bellavance,⁶⁸ J.A. Benitez,⁶⁶ S.B. Beri,²⁷ G. Bernardi,¹⁷ R. Bernhard,⁴² L. Berntzon,¹⁵ I. Bertram,⁴³ M. Besançon,¹⁸ R. Beuselinck,⁴⁴ V.A. Bezzubov,³⁹ P.C. Bhat,⁵¹ V. Bhatnagar,²⁷ M. Binder,²⁵ C. Biscarat,⁴³ K.M. Black,⁶³ I. Blackler,⁴⁴ G. Blazey,⁵³ F. Blekman,⁴⁴ S. Blessing,⁵⁰ D. Bloch,¹⁹ K. Bloom,⁶⁸ U. Blumenschein,²³ A. Boehnlein,⁵¹ O. Boeriu,⁵⁶ T.A. Bolton,⁶⁰ F. Borchering,⁵¹ G. Borissov,⁴³ K. Bos,³⁴ T. Bose,⁷⁸ A. Brandt,⁷⁹ R. Brock,⁶⁶ G. Brooijmans,⁷¹ A. Bross,⁵¹ D. Brown,⁷⁹ N.J. Buchanan,⁵⁰ D. Buchholz,⁵⁴ M. Buehler,⁸² V. Buescher,²³ S. Burdin,⁵¹ S. Burke,⁴⁶ T.H. Burnett,⁸³ E. Busato,¹⁷ C.P. Buszello,⁴⁴ J.M. Butler,⁶³ P. Calfayan,²⁵ S. Calvet,¹⁵ J. Cammin,⁷² S. Caron,³⁴ W. Carvalho,³ B.C.K. Casey,⁷⁸ N.M. Cason,⁵⁶ H. Castilla-Valdez,³³ S. Chakrabarti,²⁹ D. Chakraborty,⁵³ K.M. Chan,⁷² A. Chandra,⁴⁹ D. Chapin,⁷⁸ F. Charles,¹⁹ E. Cheu,⁴⁶ F. Chevallier,¹⁴ D.K. Cho,⁶³ S. Choi,³² B. Choudhary,²⁸ L. Christofek,⁵⁹ D. Claes,⁶⁸ B. Clément,¹⁹ C. Clément,⁴¹ Y. Coadou,⁵ M. Cooke,⁸¹ W.E. Cooper,⁵¹ D. Coppage,⁵⁹ M. Corcoran,⁸¹ M.-C. Cousinou,¹⁵ B. Cox,⁴⁵ S. Crépe-Renaudin,¹⁴ D. Cutts,⁷⁸ M. Ćwiok,³⁰ H. da Motta,² A. Das,⁶³ M. Das,⁶¹ B. Davies,⁴³ G. Davies,⁴⁴ G.A. Davis,⁵⁴ K. De,⁷⁹ P. de Jong,³⁴ S.J. de Jong,³⁵ E. De La Cruz-Burelo,⁶⁵ C. De Oliveira Martins,³ J.D. Degenhardt,⁶⁵ F. Déliot,¹⁸ M. Demarteau,⁵¹ R. Demina,⁷² P. Demine,¹⁸ D. Denisov,⁵¹ S.P. Denisov,³⁹ S. Desai,⁷³ H.T. Diehl,⁵¹ M. Diesburg,⁵¹ M. Doidge,⁴³ A. Dominguez,⁶⁸ H. Dong,⁷³ L.V. Dudko,³⁸ L. Duflot,¹⁶ S.R. Dugad,²⁹ A. Duperrin,¹⁵ J. Dyer,⁶⁶ A. Dyshkant,⁵³ M. Eads,⁶⁸ D. Edmunds,⁶⁶ T. Edwards,⁴⁵ J. Ellison,⁴⁹ J. Elmsheuser,²⁵ V.D. Elvira,⁵¹ S. Eno,⁶² P. Ermolov,³⁸ J. Estrada,⁵¹ H. Evans,⁵⁵ A. Evdokimov,³⁷ V.N. Evdokimov,³⁹ S.N. Fatakia,⁶³ L. Feligioni,⁶³ A.V. Ferapontov,⁶⁰ T. Ferbel,⁷² F. Fiedler,²⁵ F. Filthaut,³⁵ W. Fisher,⁵¹ H.E. Fisk,⁵¹ I. Fleck,²³ M. Ford,⁴⁵ M. Fortner,⁵³ H. Fox,²³ S. Fu,⁵¹ S. Fuess,⁵¹ T. Gadfort,⁸³ C.F. Galea,³⁵ E. Gallas,⁵¹ E. Galyaev,⁵⁶ C. Garcia,⁷² A. Garcia-Bellido,⁸³ J. Gardner,⁵⁹ V. Gavrilov,³⁷ A. Gay,¹⁹ P. Gay,¹³ D. Gelé,¹⁹ R. Gelhaus,⁴⁹ C.E. Gerber,⁵² Y. Gershtein,⁵⁰ D. Gillberg,⁵ G. Ginther,⁷² N. Gollub,⁴¹ B. Gómez,⁸ K. Gounder,⁵¹ A. Goussiou,⁵⁶ P.D. Grannis,⁷³ H. Greenlee,⁵¹ Z.D. Greenwood,⁶¹ E.M. Gregores,⁴ G. Grenier,²⁰ Ph. Gris,¹³ J.-F. Grivaz,¹⁶ S. Grünendahl,⁵¹ M.W. Grünewald,³⁰ F. Guo,⁷³ J. Guo,⁷³ G. Gutierrez,⁵¹ P. Gutierrez,⁷⁶ A. Haas,⁷¹ N.J. Hadley,⁶² P. Haefner,²⁵ S. Hagopian,⁵⁰ J. Haley,⁶⁹ I. Hall,⁷⁶ R.E. Hall,⁴⁸ L. Han,⁷ K. Hanagaki,⁵¹ K. Harder,⁶⁰ A. Harel,⁷² R. Harrington,⁶⁴ J.M. Hauptman,⁵⁸ R. Hauser,⁶⁶ J. Hays,⁵⁴ T. Hebbeker,²¹ D. Hedin,⁵³ J.G. Hegeman,³⁴ J.M. Heinmiller,⁵² A.P. Heinson,⁴⁹ U. Heintz,⁶³ C. Hensel,⁵⁹ G. Hesketh,⁶⁴ M.D. Hildreth,⁵⁶ R. Hirosky,⁸² J.D. Hobbs,⁷³ B. Hoeneisen,¹² H. Hoeth,²⁶ M. Hohlfeld,¹⁶ S.J. Hong,³¹ R. Hooper,⁷⁸ P. Houben,³⁴ Y. Hu,⁷³ Z. Hubacek,¹⁰ V. Hynek,⁹ I. Iashvili,⁷⁰ R. Illingworth,⁵¹ A.S. Ito,⁵¹ S. Jabeen,⁶³ M. Jaffré,¹⁶ S. Jain,⁷⁶ K. Jakobs,²³ C. Jarvis,⁶² A. Jenkins,⁴⁴ R. Jesik,⁴⁴ K. Johns,⁴⁶ C. Johnson,⁷¹ M. Johnson,⁵¹ A. Jonckheere,⁵¹ P. Jonsson,⁴⁴ A. Juste,⁵¹ D. Käfer,²¹ S. Kahn,⁷⁴ E. Kajfasz,¹⁵ A.M. Kalinin,³⁶ J.M. Kalk,⁶¹ J.R. Kalk,⁶⁶ S. Kappler,²¹ D. Karmanov,³⁸ J. Kasper,⁶³ P. Kasper,⁵¹ I. Katsanos,⁷¹ D. Kau,⁵⁰ R. Kaur,²⁷ R. Kehoe,⁸⁰ S. Kermiche,¹⁵ S. Kesisoglou,⁷⁸ N. Khalatyan,⁶³ A. Khanov,⁷⁷ A. Kharchilava,⁷⁰ Y.M. Kharzheev,³⁶ D. Khatidze,⁷¹ H. Kim,⁷⁹ T.J. Kim,³¹ M.H. Kirby,³⁵ B. Klima,⁵¹ J.M. Kohli,²⁷ J.-P. Konrath,²³ M. Kopal,⁷⁶ V.M. Korablev,³⁹ J. Kotcher,⁷⁴ B. Kothari,⁷¹ A. Koubarovsky,³⁸ A.V. Kozelov,³⁹ J. Kozminski,⁶⁶ A. Kryemadhi,⁸² S. Krzywdzinski,⁵¹ T. Kuhl,²⁴ A. Kumar,⁷⁰ S. Kunori,⁶² A. Kupco,¹¹ T. Kurča,^{20,*} J. Kvita,⁹ S. Lager,⁴¹ S. Lammers,⁷¹ G. Landsberg,⁷⁸ J. Lazoflores,⁵⁰ A.-C. Le Bihan,¹⁹ P. Lebrun,²⁰ W.M. Lee,⁵³ A. Leflat,³⁸ F. Lehner,⁴² V. Lesne,¹³ J. Leveque,⁴⁶ P. Lewis,⁴⁴ J. Li,⁷⁹ Q.Z. Li,⁵¹ J.G.R. Lima,⁵³ D. Lincoln,⁵¹ J. Linnemann,⁶⁶ V.V. Lipaev,³⁹ R. Lipton,⁵¹ Z. Liu,⁵ L. Lobo,⁴⁴ A. Lobodenko,⁴⁰ M. Lokajicek,¹¹ A. Lounis,¹⁹ P. Love,⁴³ H.J. Lubatti,⁸³ M. Lynker,⁵⁶ A.L. Lyon,⁵¹ A.K.A. Maciel,² R.J. Madaras,⁴⁷ P. Mättig,²⁶ C. Magass,²¹ A. Magerkurth,⁶⁵ A.-M. Magnan,¹⁴ N. Makovec,¹⁶ P.K. Mal,⁵⁶ H.B. Malbouisson,³ S. Malik,⁶⁸ V.L. Malyshev,³⁶ H.S. Mao,⁶ Y. Maravin,⁶⁰ M. Martens,⁵¹ S.E.K. Mattingly,⁷⁸ R. McCarthy,⁷³ R. McCroskey,⁴⁶ D. Meder,²⁴ A. Melnitchouk,⁶⁷ A. Mendes,¹⁵ L. Mendoza,⁸ M. Merkin,³⁸ K.W. Merritt,⁵¹ A. Meyer,²¹ J. Meyer,²² M. Michaut,¹⁸ H. Miettinen,⁸¹ T. Millet,²⁰ J. Mitrevski,⁷¹ J. Molina,³ N.K. Mondal,²⁹ J. Monk,⁴⁵ R.W. Moore,⁵

T. Moulik,⁵⁹ G.S. Muanza,¹⁶ M. Mulders,⁵¹ M. Mulhearn,⁷¹ L. Mundim,³ Y.D. Mutaf,⁷³ E. Nagy,¹⁵
M. Naimuddin,²⁸ M. Narain,⁶³ N.A. Naumann,³⁵ H.A. Neal,⁶⁵ J.P. Negret,⁸ S. Nelson,⁵⁰ P. Neustroev,⁴⁰
C. Noeding,²³ A. Nomerotski,⁵¹ S.F. Novaes,⁴ T. Nunnemann,²⁵ V. O'Dell,⁵¹ D.C. O'Neil,⁵ G. Obrant,⁴⁰
V. Oguri,³ N. Oliveira,³ N. Oshima,⁵¹ R. Otec,¹⁰ G.J. Otero y Garzón,⁵² M. Owen,⁴⁵ P. Padley,⁸¹ N. Parashar,⁵⁷
S.-J. Park,⁷² S.K. Park,³¹ J. Parsons,⁷¹ R. Partridge,⁷⁸ N. Parua,⁷³ A. Patwa,⁷⁴ G. Pawloski,⁸¹ P.M. Perea,⁴⁹
E. Perez,¹⁸ K. Peters,⁴⁵ P. Pétroff,¹⁶ M. Petteni,⁴⁴ R. Piegai,¹ M.-A. Pleier,²² P.L.M. Podesta-Lerma,³³
V.M. Podstavkov,⁵¹ Y. Pogorelov,⁵⁶ M.-E. Pol,² A. Pompoš,⁷⁶ B.G. Pope,⁶⁶ A.V. Popov,³⁹ W.L. Prado da Silva,³
H.B. Prosper,⁵⁰ S. Protopopescu,⁷⁴ J. Qian,⁶⁵ A. Quadt,²² B. Quinn,⁶⁷ K.J. Rani,²⁹ K. Ranjan,²⁸ P.A. Rapidis,⁵¹
P.N. Ratoff,⁴³ P. Renkel,⁸⁰ S. Reucroft,⁶⁴ M. Rijssenbeek,⁷³ I. Ripp-Baudot,¹⁹ F. Rizatdinova,⁷⁷ S. Robinson,⁴⁴
R.F. Rodrigues,³ C. Royon,¹⁸ P. Rubinov,⁵¹ R. Ruchti,⁵⁶ V.I. Rud,³⁸ G. Sajot,¹⁴ A. Sánchez-Hernández,³³
M.P. Sanders,⁶² A. Santoro,³ G. Savage,⁵¹ L. Sawyer,⁶¹ T. Scanlon,⁴⁴ D. Schaile,²⁵ R.D. Schamberger,⁷³
Y. Scheglov,⁴⁰ H. Schellman,⁵⁴ P. Schieferdecker,²⁵ C. Schmitt,²⁶ C. Schwanenberger,⁴⁵ A. Schwartzman,⁶⁹
R. Schwienhorst,⁶⁶ S. Sengupta,⁵⁰ H. Severini,⁷⁶ E. Shabalina,⁵² M. Shamim,⁶⁰ V. Shary,¹⁸ A.A. Shchukin,³⁹
W.D. Shephard,⁵⁶ R.K. Shivpuri,²⁸ D. Shpakov,⁶⁴ V. Siccadi,¹⁹ R.A. Sidwell,⁶⁰ V. Simak,¹⁰ V. Sirotenko,⁵¹
P. Skubic,⁷⁶ P. Slattery,⁷² R.P. Smith,⁵¹ G.R. Snow,⁶⁸ J. Snow,⁷⁵ S. Snyder,⁷⁴ S. Söldner-Rembold,⁴⁵ X. Song,⁵³
L. Sonnenschein,¹⁷ A. Sopczak,⁴³ M. Sosebee,⁷⁹ K. Soustruznik,⁹ M. Souza,² B. Spurlock,⁷⁹ J. Stark,¹⁴ J. Steele,⁶¹
K. Stevenson,⁵⁵ V. Stolin,³⁷ A. Stone,⁵² D.A. Stoyanova,³⁹ J. Strandberg,⁴¹ M.A. Strang,⁷⁰ M. Strauss,⁷⁶
R. Ströhmer,²⁵ D. Strom,⁵⁴ M. Strovink,⁴⁷ L. Stutte,⁵¹ S. Sumowidagdo,⁵⁰ A. Sznajder,³ M. Talby,¹⁵
P. Tamburello,⁴⁶ W. Taylor,⁵ P. Telford,⁴⁵ J. Temple,⁴⁶ B. Tiller,²⁵ M. Titov,²³ V.V. Tokmenin,³⁶ M. Tomoto,⁵¹
T. Toole,⁶² I. Torchiani,²³ S. Towers,⁴³ T. Trefzger,²⁴ S. Trincas-Duvoid,¹⁷ D. Tsybychev,⁷³ B. Tuchming,¹⁸
C. Tully,⁶⁹ A.S. Turcot,⁴⁵ P.M. Tuts,⁷¹ R. Unalan,⁶⁶ L. Uvarov,⁴⁰ S. Uvarov,⁴⁰ S. Uzunyan,⁵³ B. Vachon,⁵
P.J. van den Berg,³⁴ R. Van Kooten,⁵⁵ W.M. van Leeuwen,³⁴ N. Varelas,⁵² E.W. Varnes,⁴⁶ A. Vartapetian,⁷⁹
I.A. Vasilyev,³⁹ M. Vaupel,²⁶ P. Verdier,²⁰ L.S. Vertogradov,³⁶ M. Verzocchi,⁵¹ F. Villeneuve-Seguié,⁴⁴ P. Vint,⁴⁴
J.-R. Vlimant,¹⁷ E. Von Toerne,⁶⁰ M. Voutilainen,^{68,†} M. Vreeswijk,³⁴ H.D. Wahl,⁵⁰ L. Wang,⁶² J. Warchol,⁵⁶
G. Watts,⁸³ M. Wayne,⁵⁶ M. Weber,⁵¹ H. Weerts,⁶⁶ N. Worms,²² M. Wetstein,⁶² A. White,⁷⁹ D. Wicke,²⁶
G.W. Wilson,⁵⁹ S.J. Wimpenny,⁴⁹ M. Wobisch,⁵¹ J. Womersley,⁵¹ D.R. Wood,⁶⁴ T.R. Wyatt,⁴⁵ Y. Xie,⁷⁸
N. Xuan,⁵⁶ S. Yacoub,⁵⁴ R. Yamada,⁵¹ M. Yan,⁶² T. Yasuda,⁵¹ Y.A. Yatsunenko,³⁶ K. Yip,⁷⁴ H.D. Yoo,⁷⁸
S.W. Youn,⁵⁴ C. Yu,¹⁴ J. Yu,⁷⁹ A. Yurkewicz,⁷³ A. Zatserklyaniy,⁵³ C. Zeitnitz,²⁶ D. Zhang,⁵¹ T. Zhao,⁸³
Z. Zhao,⁶⁵ B. Zhou,⁶⁵ J. Zhu,⁷³ M. Zielinski,⁷² D. Zieminska,⁵⁵ A. Zieminski,⁵⁵ V. Zutshi,⁵³ and E.G. Zverev³⁸
(DØ Collaboration)

¹ Universidad de Buenos Aires, Buenos Aires, Argentina

² LAFEX, Centro Brasileiro de Pesquisas Físicas, Rio de Janeiro, Brazil

³ Universidade do Estado do Rio de Janeiro, Rio de Janeiro, Brazil

⁴ Instituto de Física Teórica, Universidade Estadual Paulista, São Paulo, Brazil

⁵ University of Alberta, Edmonton, Alberta, Canada, Simon Fraser University, Burnaby, British Columbia, Canada, York University, Toronto, Ontario, Canada, and McGill University, Montreal, Quebec, Canada

⁶ Institute of High Energy Physics, Beijing, People's Republic of China

⁷ University of Science and Technology of China, Hefei, People's Republic of China

⁸ Universidad de los Andes, Bogotá, Colombia

⁹ Center for Particle Physics, Charles University, Prague, Czech Republic

¹⁰ Czech Technical University, Prague, Czech Republic

¹¹ Center for Particle Physics, Institute of Physics, Academy of Sciences of the Czech Republic, Prague, Czech Republic

¹² Universidad San Francisco de Quito, Quito, Ecuador

¹³ Laboratoire de Physique Corpusculaire, IN2P3-CNRS, Université Blaise Pascal, Clermont-Ferrand, France

¹⁴ Laboratoire de Physique Subatomique et de Cosmologie, IN2P3-CNRS, Université de Grenoble 1, Grenoble, France

¹⁵ CPPM, IN2P3-CNRS, Université de la Méditerranée, Marseille, France

¹⁶ IN2P3-CNRS, Laboratoire de l'Accélérateur Linéaire, Orsay, France

¹⁷ LPNHE, IN2P3-CNRS, Universités Paris VI and VII, Paris, France

¹⁸ DAPNIA/Service de Physique des Particules, CEA, Saclay, France

¹⁹ IReS, IN2P3-CNRS, Université Louis Pasteur, Strasbourg, France, and Université de Haute Alsace, Mulhouse, France

²⁰ Institut de Physique Nucléaire de Lyon, IN2P3-CNRS, Université Claude Bernard, Villeurbanne, France

²¹ III. Physikalisches Institut A, RWTH Aachen, Aachen, Germany

²² Physikalisches Institut, Universität Bonn, Bonn, Germany

²³ Physikalisches Institut, Universität Freiburg, Freiburg, Germany

²⁴ Institut für Physik, Universität Mainz, Mainz, Germany

²⁵ Ludwig-Maximilians-Universität München, München, Germany

²⁶ Fachbereich Physik, University of Wuppertal, Wuppertal, Germany

- ²⁷ Panjab University, Chandigarh, India
²⁸ Delhi University, Delhi, India
²⁹ Tata Institute of Fundamental Research, Mumbai, India
³⁰ University College Dublin, Dublin, Ireland
³¹ Korea Detector Laboratory, Korea University, Seoul, Korea
³² SungKyunKwan University, Suwon, Korea
³³ CINVESTAV, Mexico City, Mexico
³⁴ FOM-Institute NIKHEF and University of Amsterdam/NIKHEF, Amsterdam, The Netherlands
³⁵ Radboud University Nijmegen/NIKHEF, Nijmegen, The Netherlands
³⁶ Joint Institute for Nuclear Research, Dubna, Russia
³⁷ Institute for Theoretical and Experimental Physics, Moscow, Russia
³⁸ Moscow State University, Moscow, Russia
³⁹ Institute for High Energy Physics, Protvino, Russia
⁴⁰ Petersburg Nuclear Physics Institute, St. Petersburg, Russia
⁴¹ Lund University, Lund, Sweden, Royal Institute of Technology and Stockholm University, Stockholm, Sweden, and Uppsala University, Uppsala, Sweden
⁴² Physik Institut der Universität Zürich, Zürich, Switzerland
⁴³ Lancaster University, Lancaster, United Kingdom
⁴⁴ Imperial College, London, United Kingdom
⁴⁵ University of Manchester, Manchester, United Kingdom
⁴⁶ University of Arizona, Tucson, Arizona 85721, USA
⁴⁷ Lawrence Berkeley National Laboratory and University of California, Berkeley, California 94720, USA
⁴⁸ California State University, Fresno, California 93740, USA
⁴⁹ University of California, Riverside, California 92521, USA
⁵⁰ Florida State University, Tallahassee, Florida 32306, USA
⁵¹ Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA
⁵² University of Illinois at Chicago, Chicago, Illinois 60607, USA
⁵³ Northern Illinois University, DeKalb, Illinois 60115, USA
⁵⁴ Northwestern University, Evanston, Illinois 60208, USA
⁵⁵ Indiana University, Bloomington, Indiana 47405, USA
⁵⁶ University of Notre Dame, Notre Dame, Indiana 46556, USA
⁵⁷ Purdue University Calumet, Hammond, Indiana 46323, USA
⁵⁸ Iowa State University, Ames, Iowa 50011, USA
⁵⁹ University of Kansas, Lawrence, Kansas 66045, USA
⁶⁰ Kansas State University, Manhattan, Kansas 66506, USA
⁶¹ Louisiana Tech University, Ruston, Louisiana 71272, USA
⁶² University of Maryland, College Park, Maryland 20742, USA
⁶³ Boston University, Boston, Massachusetts 02215, USA
⁶⁴ Northeastern University, Boston, Massachusetts 02115, USA
⁶⁵ University of Michigan, Ann Arbor, Michigan 48109, USA
⁶⁶ Michigan State University, East Lansing, Michigan 48824, USA
⁶⁷ University of Mississippi, University, Mississippi 38677, USA
⁶⁸ University of Nebraska, Lincoln, Nebraska 68588, USA
⁶⁹ Princeton University, Princeton, New Jersey 08544, USA
⁷⁰ State University of New York, Buffalo, New York 14260, USA
⁷¹ Columbia University, New York, New York 10027, USA
⁷² University of Rochester, Rochester, New York 14627, USA
⁷³ State University of New York, Stony Brook, New York 11794, USA
⁷⁴ Brookhaven National Laboratory, Upton, New York 11973, USA
⁷⁵ Langston University, Langston, Oklahoma 73050, USA
⁷⁶ University of Oklahoma, Norman, Oklahoma 73019, USA
⁷⁷ Oklahoma State University, Stillwater, Oklahoma 74078, USA
⁷⁸ Brown University, Providence, Rhode Island 02912, USA
⁷⁹ University of Texas, Arlington, Texas 76019, USA
⁸⁰ Southern Methodist University, Dallas, Texas 75275, USA
⁸¹ Rice University, Houston, Texas 77005, USA
⁸² University of Virginia, Charlottesville, Virginia 22901, USA
⁸³ University of Washington, Seattle, Washington 98195, USA

(Dated: May 3, 2006)

We present a search for supersymmetry in the R -parity violating resonant production and decay of smuons and muon-sneutrinos in the channels $\tilde{\mu} \rightarrow \tilde{\chi}_1^0 \mu$, $\tilde{\mu} \rightarrow \tilde{\chi}_{2,3,4}^0 \mu$, and $\tilde{\nu}_\mu \rightarrow \tilde{\chi}_{1,2}^\pm \mu$. We analyzed 0.38 fb^{-1} of integrated luminosity collected between April 2002 and August 2004 with the

D0 detector at the Fermilab Tevatron Collider. The observed number of events is in agreement with the standard model expectation, and we calculate 95% C.L. limits on the slepton production cross section times branching fraction to gaugino plus muon, as a function of slepton and gaugino masses. In the framework of minimal supergravity, we set limits on the coupling parameter λ'_{211} , extending significantly previous results obtained in Run I of the Tevatron and at the CERN LEP collider.

PACS numbers: 11.30.Pb, 04.65.+e, 12.60.Jv

Supersymmetry (SUSY) predicts the existence of a new particle for every standard model (SM) particle, differing by half a unit in spin. The quantum number R -parity [1], defined as $R = (-1)^{3B+L+2S}$, where B , L and S are the baryon, lepton and spin quantum numbers, is $+1$ for SM and -1 for SUSY particles. Often R -parity is assumed to be conserved, which leaves the lightest supersymmetric particle (LSP) stable. However, SUSY does not require R -parity conservation.

If R -parity violation ($\mathcal{R}_p$) is allowed, the following trilinear and bilinear terms appear in the superpotential [2]:

$$W_{\mathcal{R}_p} = \frac{1}{2} \lambda_{ijk} L_i^\alpha L_j^\beta \bar{E}_k + \lambda'_{ijk} L_i^\alpha Q_j^\beta \bar{D}_k + \frac{1}{2} \lambda''_{ijk} \bar{U}_i^\xi \bar{D}_j^\psi \bar{D}_k^\zeta + \mu_i L_i H_1 \quad (1)$$

where L and Q are the lepton and quark $SU(2)$ doublet superfields and E , U , D denote the singlet fields. The indices have the following meaning: $i, j, k = 1, 2, 3$ = family index; $\alpha, \beta = 1, 2$ = weak isospin index; $\xi, \psi, \zeta = 1, 2, 3$ = color index. The coupling strengths are given by the Yukawa coupling constants λ, λ' and λ'' . The last term, $\mu_i L_i H_1$, mixes the lepton and the Higgs superfields. The λ and λ' couplings give rise to final states with multiple leptons, which provide excellent signatures at the Tevatron.

In the following we assume that only λ'_{211} can be non-zero. This implies (muon) lepton number violation. The $\mathcal{R}_p$ coupling constants are already constrained by low-energy experiments, in particular $\lambda'_{211} < 0.059 \cdot m_{\tilde{q}}/100 \text{ GeV}$ [3]. For the squark masses $m_{\tilde{q}}$ kinematically accessible at the Tevatron, this limit on λ'_{211} is significantly improved by the present analysis.

The D0 Collaboration searched for resonant slepton production in Run I [4]. The H1 experiment at DESY searched for resonant squark production [5] in the framework of R -parity violating supersymmetry and published limits on the couplings λ'_{1jk} . The combined limits from the LEP collider at CERN [6], assuming R -parity violating decay via $LQ\bar{D}$ -couplings, are $m(\tilde{\chi}_1^0) \geq 39 \text{ GeV}$, $m(\tilde{\chi}_1^\pm) \geq 103 \text{ GeV}$, $m(\tilde{\nu}_\mu) \geq 78 \text{ GeV}$ and $m(\tilde{\mu}) \geq 90 \text{ GeV}$.

At $p\bar{p}$ colliders, an initial $q\bar{q}$ pair can produce a single smuon or muon-sneutrino assuming a non-zero λ'_{211} coupling. The s -channel production is dominant and depends on the value of this coupling. The contributions of the t and u channels are negligible compared to the resonant s channel [7].

The slepton can then decay into a lepton and a gaugino without violating R -parity. The λ'_{211} coupling allows

neutralino decays via virtual sparticles (such as muon-sneutrinos, smuons and squarks) into two 1st generation quarks and one 2nd generation lepton. The $\tilde{\chi}_1^0$ decay branching fractions as predicted by mSUGRA, with the ratio of the Higgs expectation values $\tan\beta = 5$, the sign of the Higgsino mass parameter $\mu < 0$, and the common trilinear scalar coupling $A_0 = 0$, are assumed, leading to $\text{BR}(\tilde{\chi}_1^0 \rightarrow \mu q_1 \bar{q}'_1) \approx \text{BR}(\tilde{\chi}_1^0 \rightarrow \nu_\mu q_1 \bar{q}'_1)$. In this analysis, the value of λ'_{211} is always larger than 0.03, therefore the corresponding decay length is negligible. The dominant slepton intermediate decays as well as the corresponding final states are indicated in Table I.

$\tilde{l}$ decay channel	Dominant final states
$\tilde{\mu} \rightarrow \tilde{\chi}_1^0 \mu$	2 μ , 2 jets
$\tilde{\mu} \rightarrow \tilde{\chi}_1^\pm \nu_\mu$	1 μ , $\cancel{E}_T$, 4 jets
$\tilde{\nu}_\mu \rightarrow \tilde{\chi}_1^0 \nu_\mu$	1 μ , $\cancel{E}_T$, 2 jets
$\tilde{\nu}_\mu \rightarrow \tilde{\chi}_1^\pm \mu$	2 μ , 4 jets

TABLE I: Smuon and muon-sneutrino decay channels: the final states correspond to $\tilde{\chi}_1^0 \rightarrow \mu q_1 \bar{q}'_1$ and $\tilde{\chi}_1^\pm \rightarrow q q' \tilde{\chi}_1^0$.

Because of the challenging multi-jet QCD environment and the advantage of the ability to reconstruct the neutralino and smuon masses, at least two muons were required in the final state. This leaves the three channels (i) $\tilde{\mu} \rightarrow \tilde{\chi}_1^0 \mu$, (ii) $\tilde{\mu} \rightarrow \tilde{\chi}_{2,3,4}^0 \mu$, and (iii) $\tilde{\nu}_\mu \rightarrow \tilde{\chi}_{1,2}^\pm \mu$ which are analyzed independently. The analysis is insensitive to events where the $\tilde{\chi}_1^0$ decays into $\nu_\mu \bar{q} q'$ and where no second muon is created in the cascade.

The data for this analysis were recorded by the D0 detector between April 2002 and August 2004 at a center-of-mass energy of 1.96 TeV. The integrated luminosity corresponds to $380 \pm 25 \text{ pb}^{-1}$.

The D0 detector [8] has a central tracking system consisting of a silicon microstrip tracker and a central fiber tracker, both located within a 2 T superconducting solenoidal magnet, with designs optimized for tracking and vertexing at pseudorapidities $|\eta| < 3$ and $|\eta| < 2.5$, respectively. A liquid-argon and uranium calorimeter has a central section covering pseudorapidities $|\eta| \lesssim 1.1$, and two end calorimeters that extend coverage to $|\eta| \approx 4.2$. The muon system covering $|\eta| < 2.0$ consists of a layer of tracking detectors and scintillation trigger counters in front of 1.8 T iron toroids, followed by two similar layers behind the toroids. The first level of the trigger (level 1) is based on fast information from the tracking, calorimetry, and muon systems. At the next trigger stage (level

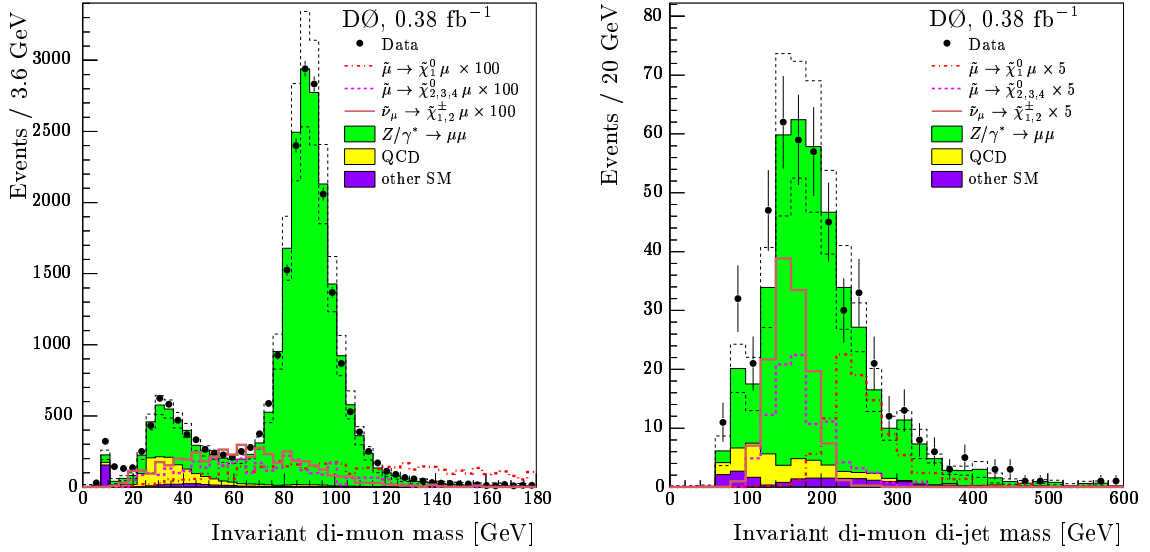


FIG. 1: Invariant di-muon mass in the two-muon sample (a) and reconstructed 4-body mass of two muons and two jets (b). The cascade decays in channels (ii) and (iii) lead to less energy per particle, thus lower invariant masses. The signal expectation for the point with $m_{\tilde{t}} = 260$ GeV and $m_{\tilde{\chi}_1^0} = 100$ GeV is scaled in plot (a) by a factor of 100 and in plot (b) by a factor of 5. The dominant SM background is $Z/\gamma^* \rightarrow \mu\mu$; other SM backgrounds are $Z/\gamma^* \rightarrow \tau\tau$; WW , WZ , ZZ , $t\bar{t}$ and Υ production. The total SM uncertainty is shown as a dashed black line. The data is in good agreement with the SM expectation.

2), the rate is reduced further. These first two levels of triggering rely mainly on hardware and firmware. The final level of the trigger, level 3, with access to the full event information, uses software algorithms to reduce the rate to tape to 50 Hz.

The signal was simulated with SUSYGEN [9]. The leading-order SUSYGEN signal cross sections have been multiplied by higher order, slepton-mass dependent QCD-correction factors [10] of size 1.4 – 1.5 calculated with the CTEQ6M [11] parton distribution functions (PDFs). The influence of the PDF uncertainty on the cross section is 3%–6%, estimated from the CTEQ6M error functions. The influence of the renormalization scale and the factorization scale μ_F is less than 5% for all slepton masses below 500 GeV, if $m(\tilde{t})/2 \leq \mu_F \leq 2 \cdot m(\tilde{t})$ [12].

The dominant background is inclusive production of $Z/\gamma^* \rightarrow \mu\mu$. It was simulated with the PYTHIA [13] Monte Carlo (MC) generator and normalized using the predicted next-to-next-to leading order cross section [14], calculated with the CTEQ6 PDFs. All other SM processes contribute only slightly to the total background as seen in Fig. 1. These contributions were simulated using the PYTHIA and ALPGEN generators and normalized using next-to leading order cross section predictions calculated using CTEQ6M PDFs. All MC events were passed through a detailed detector simulation based on GEANT [15], followed by the reconstruction program used for data.

Events were collected with di-muon triggers requiring at least two muons at level 1. At level 3 at least one track or one muon with a varying transverse momen-

tum p_T threshold of typically 5 – 15 GeV was required. To account for the trigger effects, simulated events were weighted using efficiencies determined from the data.

All events were required to contain two muons. One of the muons was required to have $p_T > 15$ GeV, and the second muon was required to have $p_T > 8$ GeV. A central track match was required for both muons. The muons in the signal are expected to be isolated. We define muons as “loose” (“tight”) isolated, if the sum of the p_T of the tracks in a cone with radius $R_{\text{cone}} = \sqrt{\Delta\phi^2 + \Delta\eta^2} = 0.5$, where $\eta = -\ln \tan \frac{\theta}{2}$ is the pseudorapidity and θ is the azimuthal angle, around the muon direction is less than 10 GeV (2.5 GeV), and the sum of the transverse energies of the calorimeter cells in a hollow cone ($0.1 \leq R_{\text{cone}} \leq 0.4$) is less than 10 GeV (2.5 GeV). Both selected muons were required to pass the tight isolation requirement. The invariant di-muon mass distribution of this di-muon sample is shown in Fig. 1a. At least two jets with transverse momentum $p_T \geq 15$ GeV and reconstructed with a cone algorithm ($R_{\text{cone}} = 0.5$) [16] were required. Only jets within $|\eta| < 2.0$ were used. The reconstructed slepton mass with two muons and two jets is shown in Fig. 1b. The event selection is summarized in Table II.

Background from multi-jet QCD events was extracted from data using loose muon isolation requirements. This QCD enriched data sample was scaled to match the data in a signal free region. At least one isolation criterion with respect to other energy depositions in the calorimeter or to other tracks must not be tight for at least one muon to separate QCD and the data sample.

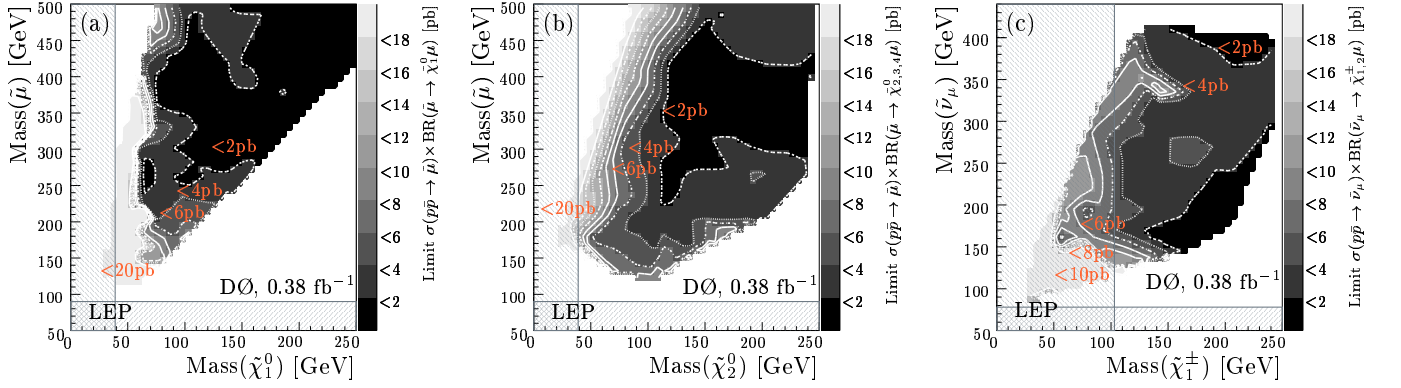


FIG. 2: 95% C.L. limit on slepton production cross section times branching fraction to gaugino plus muon for the channels (i) $\tilde{\mu} \rightarrow \tilde{\chi}_1^0 \mu$ (a), (ii) $\tilde{\mu} \rightarrow \tilde{\chi}_{2,3,4}^0 \mu$ (b) and (iii) $\tilde{\nu}_\mu \rightarrow \tilde{\chi}_{1,2}^\pm \mu$ (c) as a function of slepton and gaugino masses. The darkest region corresponds to a cross section of less than 2 pb. Successively lighter regions have successively higher limits.

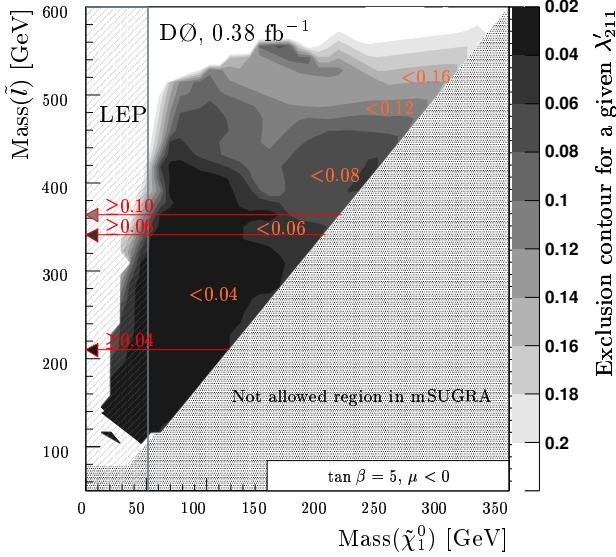


FIG. 3: 95% C.L. exclusion contour on λ'_{211} couplings within the mSUGRA framework for $\tan \beta = 5$ and $\mu < 0$. The arrows indicate limits on the slepton mass $\tilde{l}$, for a given coupling λ'_{211} .

Two-dimensional selection requirements in planes spanned by the reconstructed $\tilde{l}$ and $\tilde{\chi}$ candidate masses, the invariant di-muon and di-jet masses, and the sums

Cut	Data	SM expectation	Signal eff.
2μ selection	23206	$22700 \pm 70 \pm 2900$	$5.5\% \pm 0.7\%$
$p_T \text{ jet}_1 > 15 \text{ GeV}$	3852	$3760 \pm 40 \pm 560$	$4.8\% \pm 0.6\%$
$p_T \text{ jet}_2 > 15 \text{ GeV}$	475	$430 \pm 10 \pm 80$	$2.4\% \pm 0.3\%$

TABLE II: Expected and observed events at different stages of the event selection. The signal efficiency is given for the point with $m_{\tilde{l}} = 260 \text{ GeV}$ and $m_{\tilde{\chi}_1^0} = 100 \text{ GeV}$ with respect to the total slepton production. The first uncertainty on the SM expectation is statistical, the second is due to systematics.

of muon momenta and jet momenta were used to separate the signal s from SM backgrounds b . The selection requirements were chosen so that the *signal efficiency* $\times$ *signal purity* $\propto \frac{s}{s+b}$ of a specific cut, applied on a training sample, was maximized. The selection requirements were optimized for each (slepton mass, gaugino mass) combination (117 in total).

In the $\tilde{\mu} \rightarrow \tilde{\chi}_1^0 \mu$ analysis (i), the slepton mass was reconstructed with the two leading muons and the two jets. In the signal MC, the leading muon usually originates from the slepton decay vertex. The neutralino mass was therefore reconstructed with both jets and the next-to-leading muon.

Hadronic decays of vector bosons from the gaugino cascade to $\tilde{\chi}_1^0$ can lead to additional jets in channels (ii) and (iii). A simple likelihood was calculated for each combination to reconstruct a vector boson and the neutralino candidate mass. The slepton mass was reconstructed from all jets with $E_T > 15 \text{ GeV}$ and the two leading muons.

After the optimization, for the point with $m_{\tilde{l}} = 260 \text{ GeV}$ and $m_{\tilde{\chi}_1^0} = 100 \text{ GeV}$, we find 14/28/8 events in the data while $11.9 \pm 2.1^{+1.5}_{-1.6} / 25.4 \pm 3.2^{+6.7}_{-4.2} / 6.5 \pm 1.6^{+2.0}_{-1.2}$ events are expected from SM backgrounds, respectively, with a typical signal efficiency of up to 2%. For all 117 mass combinations, the data is in agreement with the SM expectation throughout the entire event selection range.

The systematic uncertainties from different sources were added in quadrature. For the limit calculation, the total systematic uncertainties of the background and signal samples were taken to be 100% correlated. A summary of the uncertainties is given in Table III with their contributions to the two muon and two jet sample.

In the absence of an excess in the data, we set cross section limits on resonant slepton production. To be as model independent as possible, we calculated 95% C.L. limits with respect to the slepton production cross sec-

Uncertainty	Background	Signal
Jet energy scale	13.7%	2 – 26%
Muon ID	7.8%	8 – 14%
Luminosity (does not apply to QCD)	5.5%	6.5%
Trigger efficiency	5.2%	4 – 9%
MC σ , K -factor, PDF	3.7%	5%
QCD background estimation	3.1%	—
MC statistics	2.2%	3 – 24%

TABLE III: Effect of the systematic uncertainties in the two muon and two jet sample on background and signal cross sections. The muon ID contribution comprises the uncertainties due to muon reconstruction, isolation, track finding and matching, and resolution for the two muons. The systematic uncertainties on the signal strongly depend on the neutralino mass, so a typical range is given.

tion times branching fraction to gaugino plus muon using the CL_s method [17]. The limit is then given in the slepton-mass and gaugino-mass plane, as shown in Fig. 2. In addition, our results are shown in Fig. 3 as λ'_{211} exclusion contours interpreted within the mSUGRA framework, with $\tan\beta = 5$, $\mu < 0$, and $A_0 = 0$. The slepton-mass and gaugino-mass pair define the universal scalar and fermion masses m_0 and $m_{1/2}$. All three channels were combined to form one limit for $q\bar{q} \rightarrow \tilde{l}$, with $\tilde{l} = \tilde{\mu}, \tilde{\nu}_\mu$.

A lower limit on the slepton mass for a given $LQ\bar{D}$ -coupling λ'_{211} can be extracted from Fig. 3. These limits do not depend on other masses. They are indicated by arrows and summarized in Table IV. Similarly, the exclusion contour can be translated within mSUGRA into constraints on other masses and parameters.

Excluded slepton mass range	Coupling strength
$m(\tilde{l}) \leq 210$ GeV	for $\lambda'_{211} \geq 0.04$
$m(\tilde{l}) \leq 340$ GeV	for $\lambda'_{211} \geq 0.06$
$m(\tilde{l}) \leq 363$ GeV	for $\lambda'_{211} \geq 0.10$

TABLE IV: Limits on the slepton mass $\tilde{l}$ for a given $LQ\bar{D}$ -coupling λ'_{211} and $\tan\beta = 5$, $\mu < 0$ from Fig. 3.

In summary, we have searched for R -parity violating supersymmetry via a non-zero $LQ\bar{D}$ -coupling λ'_{211} in final states with at least two muons and two jets. No excess in comparison with SM expectation was found and we set model independent cross section limits, improved compared to D0 Run I by one order of magnitude. The limits are interpreted within the mSUGRA framework and translated into the best constraints to date on the coupling strength λ'_{211} . D0 Run I excluded slepton masses up to 280 GeV for $\lambda'_{211} = 0.09$ and $m(\tilde{\chi}_1^0) = 200$ GeV. Now, slepton masses up to 358 GeV can be excluded, for

$\lambda'_{211} = 0.09$ independent of other masses.

We thank the staffs at Fermilab and collaborating institutions, and acknowledge support from the DOE and NSF (USA); CEA and CNRS/IN2P3 (France); FASI, Rosatom and RFBR (Russia); CAPES, CNPq, FAPERJ, FAPESP and FUNDUNESP (Brazil); DAE and DST (India); Colciencias (Colombia); CONACyT (Mexico); KRF and KOSEF (Korea); CONICET and UBACyT (Argentina); FOM (The Netherlands); PPARC (United Kingdom); MSMT (Czech Republic); CRC Program, CFI, NSERC and WestGrid Project (Canada); BMBF and DFG (Germany); SFI (Ireland); The Swedish Research Council (Sweden); Research Corporation; Alexander von Humboldt Foundation; and the Marie Curie Program.

[*] On leave from IEP SAS Kosice, Slovakia.

[†] Visitor from Helsinki Institute of Physics, Helsinki, Finland.

- [1] G. R. Farrar and P. Fayet, Phys. Lett. B **76**, 575 (1978).
- [2] S. Weinberg, Phys. Rev. D **26**, 287 (1982); N. Sakai and T. Yanagida, Nucl. Phys. B **197**, 533 (1982).
- [3] B. C. Allanach, A. Dedes, and H. Dreiner, Phys. Rev. D **60**, 075014 (1999); F. Ledroit and G. Sajot, GDR-S-008 (ISN, Grenoble, 1998); V. Barger, G. F. Giudice, and T. Han, Phys. Rev. D **40**, 2987 (1989).
- [4] V. Abazov *et al.* (D0 Collaboration), Phys. Rev. Lett. **89**, 261801 (2002).
- [5] A. Aktas *et al.* (H1 Collaboration), Eur. Phys. J. C **36**, 425 (2004).
- [6] R. Barbier *et al.*, Phys. Rept. **420**, 1 (2005).
- [7] F. Deliot, G. Moreau, and C. Royon, Eur. Phys. J. C **19**, 155 (2001).
- [8] V. Abazov *et al.* (D0 Collaboration), submitted to Nucl. Instrum. Methods Phys. Res. A, arXiv-physics/0507191.
- [9] N. Ghodbane, S. Katsanevas, P. Morawitz, and E. Perez, SUSYGEN3, arXiv:hep-ph/9909499, a modified version by E. Perez was used.
- [10] D. Choudhury, S. Majhi, and V. Ravindran, Nucl. Phys. B **660**, 343 (2003).
- [11] J. Pumplin *et al.*, JHEP **0207**, 012 (2002); D. Stump *et al.*, JHEP **0310**, 046 (2003).
- [12] H. Dreiner, S. Grab, M. Krämer, and M. Trenkel, paper in preparation.
- [13] T. Sjöstrand *et al.*, Comput. Phys. Commun. **135**, 238 (2001).
- [14] R. Hamberg, W. L. van Neerven and T. Matsuura, Nucl. Phys. B **359**, 343 (1991).
- [15] R. Brun and F. Carminati, CERN Program Library Long Writeup W5013, unpublished (1993).
- [16] G. C. Blazey *et al.*, arXiv:hep-ex/0005012.
- [17] T. Junk, Nucl. Instrum. Methods Phys. Res. A **434**, 435 (1999).